

Fibreco connectors

MIL-DTL-83526 Certified Connector

Productsheet
Fibreco MIL-DTL-83526 Certified

V1.0, 17-05-2016

Contact

In case of any questions
Call us on +31 (0)416-387700 or
sent an email to:
sales@simacelectronics.nl.

We like to help you!



The Fibreco advantage

Our military certified expanded beam connectors have been designed for use in the most demanding harsh environment applications including military tactical communications, outside broadcast, petrochemical plant, mining, and offshore systems. The connectors are terminated using an epoxy-polish ferrule termination process with standard fiber optic termination tools and equipment. The terminated ferrules are simply inserted into the expanded beam housing and fixed in place via a spring and cover-plate. Ferrule alignment to the lenses is achieved automatically by the unique optical arrangement developed and patented by Cinch Fibreco. In the event of the connector suffering severe damage in use, the connector design enables replacement of the expanded beam insert, connector front body and grip ring without the need to re-terminate the fibers. Typically, an expanded beam insert can be replaced within 30 minutes in field conditions. The MIL-DTL-83526 Certified expanded beam connectors offer high performance, flexibility and cost effectiveness, combined with a simple termination process allowing rapid in-field termination and repair.

Features

- MIL-DTL-83526/20 & /21 QPL
- Singlemode, Multimode and mixed-mode Options
- Field terminable using standard termination tools & equipment
- Field repairable: EB insert & shell components replaceable / re-useable
- 1, 2 & 4 channel plugs and bulkheads
- Low insertion loss / high return loss
- Cage Code - 71785

Fibreco Expanded Beam
Fast and easy
Suitable for many applications
Designed for harsh environment

Fibreco connectors

MIL-DTL-83526 Certified Connector

Optical

Insertion Loss Singlemode: -2.5dB (typical -1.5dB)*

 Multimode: -2.0dB (typical -1.0dB)*

Return Loss > 35dB (typical 40dB) singlemode

*performance is dependent on assembly & termination; figures relate to CCS terminated harnesses.

Mechanical

Durability 3000 Matings minimum

Free Fall Resistance 500 Falls from 1.2m height

Vibration/Shock As per MIL-DTL-83526/20 /21

Crush Resistance 6.7kN

Cable Retention 1800N (Cable Dependant)

Weight (approx) Plug: 120g Bulkhead: 110g

Connector Shell Material / Color Aluminium, Plug: black anodised

 Bulkhead: zinc cobalt /Grip & boot: Black fluorosilicone

Enviromental

Operating Temperature -46°C to +71°C

Storage Temperature -57°C to +85°C

Water Immersion 15m for 24 hours (Plug & Bulkhead; mated and open-face)

Corrosion Resistance 500 Hours Salt Spray

More information


Check www.simacelectronics.nl or call us on +31 (0) 416 387 711. We like to help you!

Fibreco connectors


MIL-DTL-83526 Certified Connector

Drawings


Plug Connector

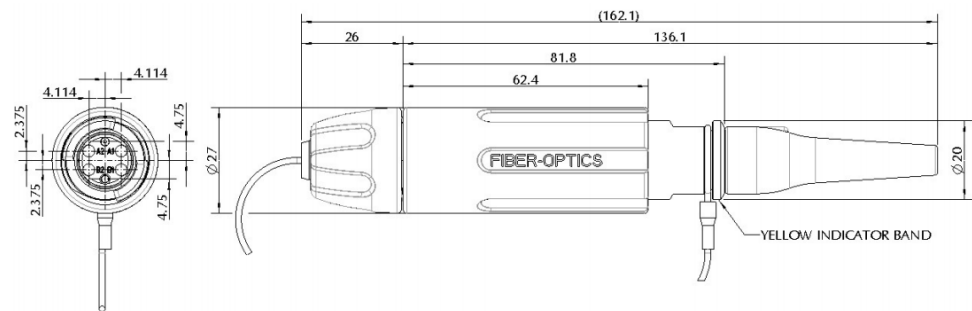

Optical Insert Arrangements

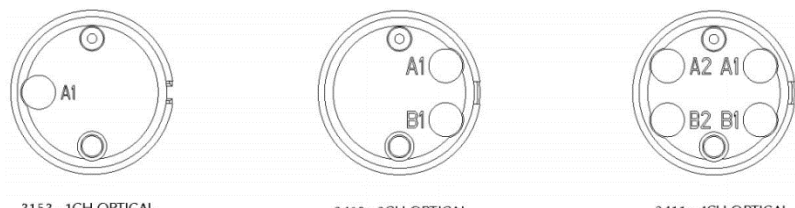

Bulkhead Connector

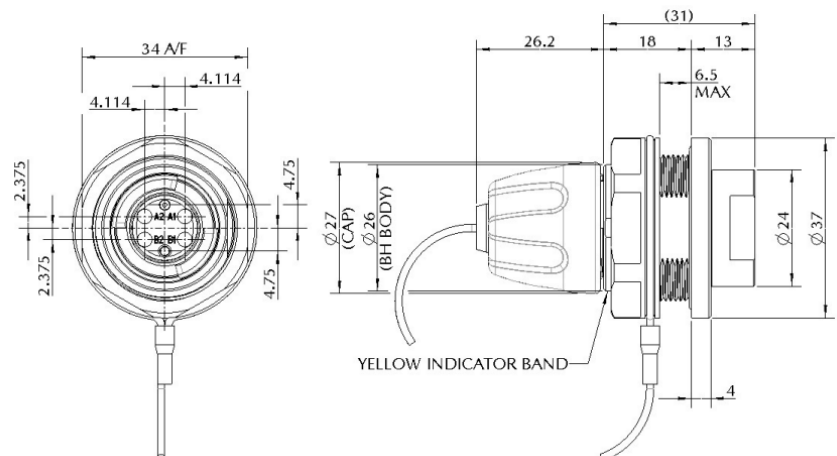

Panel cut-out

