



# HUBER+SUHNER®

## SENCITY® RAIL ANTENNA

### FOR WIRELESS COMMUNICATION



#### SWA 0859/360/4/0/DFRX30

**Multiband antenna: GSM 900, GSM 1800, GSM/PCS 1900, UMTS, 2.4, 3.5, 5.3 and 5.8 GHz Bands and GPS including LNA**

#### Technical Data

##### Electrical Properties Broadband Antenna

Frequency range (MHz)	870 - 960	1710 - 2170	2400 - 2700	3400 - 3700	5150 - 5875
Impedance	50 $\Omega$				
VSWR	< 1.5	< 1.5	< 1.5	< 1.5	< 2.0
Polarization	linear, vertical				
Gain (using a 1 m <sup>2</sup> ground plane)	6 dBi	8.5 dBi	9.5 dBi	9.5 dBi	8.5 dBi
Max. power	400 W (CW) at 50°C				

##### Electrical Properties GPS Antenna

Frequency range	1575.42 $\pm$ 1.023 MHz				
Impedance	50 $\Omega$				
VSWR	$\leq$ 1.8				
Polarization	right hand circular polarized (RHCP)				
Antenna gain (using a 1 m <sup>2</sup> ground plane)	6 dBi (ref. to a circularly polarized isotropic antenna)				
Gain LNA	27 $\pm$ 2 dB				
Noise figure	$\leq$ 2.7 dB, typ. 2 dB				
Operating voltage	3.0 to 5.5 VDC feed at centre conductor of GPS antenna				
Current consumption	$\leq$ 25 mA, typ. 20 mA				
Out of band attenuation	> 20 dB at $f_0 \pm 50$ MHz > 40 dB at $f_0 \pm 100$ MHz				
Isolation between ports	> 30 dB	> 40 dB	> 40 dB	> 37 dB	> 28 dB

##### Mechanical Properties

Dimensions	260 x 100 x 90 mm (10.24" x 3.94" x 3.54") <i>without mounting accessory 9091.99.0189</i>				
Weight	1.2 kg (2.65 lbs.)				
Housing material	aluminium powder painted RAL 7043 (dark grey)				
Radome material	high impact acrylic styrene acrylonitrile (HRA150)				
Radome color	RAL 7043 (dark grey)				
Operating temperature range	- 30°C to + 85°C				
Storage temperature range	- 40°C to + 80°C				

Meets the following requirements:

- Degree of protection according to EN 60529 with splash waterproof level IP66 (only if correctly installed).
- EN 50155, electronic equipment used on rolling stock.
- EN 50124-1, insulation coordination (27.5 KV AC and 3.8 KV DC).
- High voltage and high current protection according to Deutsche Bahn specifications (protection against short circuits of 40 KA).
- EN 50121-3-2, electromagnetic compatibility.

##### Available Types

Article no.	
1399.17.0044	84002818   2 x N female

##### Mounting Hardware

Article no.	
9091.99.0189	84008192   Adapter panel <sup>1</sup>

<sup>1</sup>: Allowing the replacement of the antenna from another antenna manufacturer, without any modifications of the original mounting holes located on the vehicle's roof. Using this interface, the mounting holes dimension for the broadband and GPS connectors have to be 17 ... 42 mm and 35 ... 42 mm respectively (ref. to mounting instruction). The antenna has to be secured using four M10 screws.

##### Documents

01.02.0777	security instruction
01.02.1045	mounting instruction

**Material:** The antenna is designed according the military standard MIL-F-14072D, which guarantees a long-life without corrosion.

**Mounting:** On a plane conductive surface clear of paint and other contaminants.

To ensure a correct sealing between the antenna and the roof, the connector mounting hole dimensions have to be 17 ... 42 mm for the broadband antenna and 35 ... 42 mm for GPS antenna. The antenna has to be secured using four M8 screws.


**Grounding and high voltage protection:** All antenna parts are grounded to protect against lightning and catenary lines according to UIC 533.



# HUBER+SUHNER® SENCITY® RAIL ANTENNA FOR WIRELESS COMMUNICATION

**SWA 0859/360/4/0/DFRX30**


Dimensions (mm)

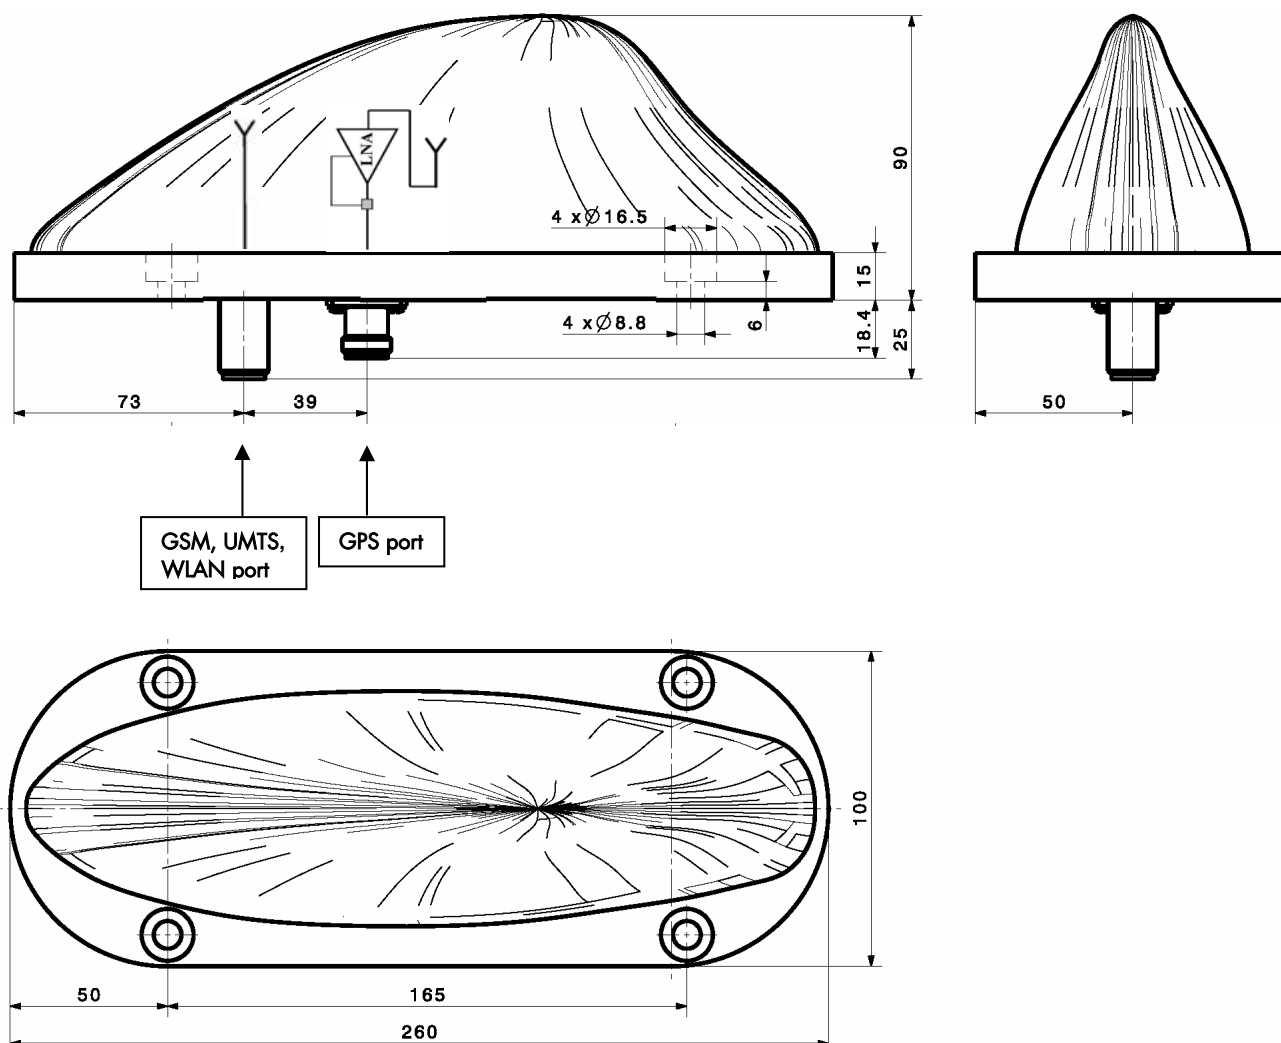



# HUBER+SUHNER® SENCITY® RAIL ANTENNA FOR WIRELESS COMMUNICATION

**SWA 0859/360/4/0/DFRX30**

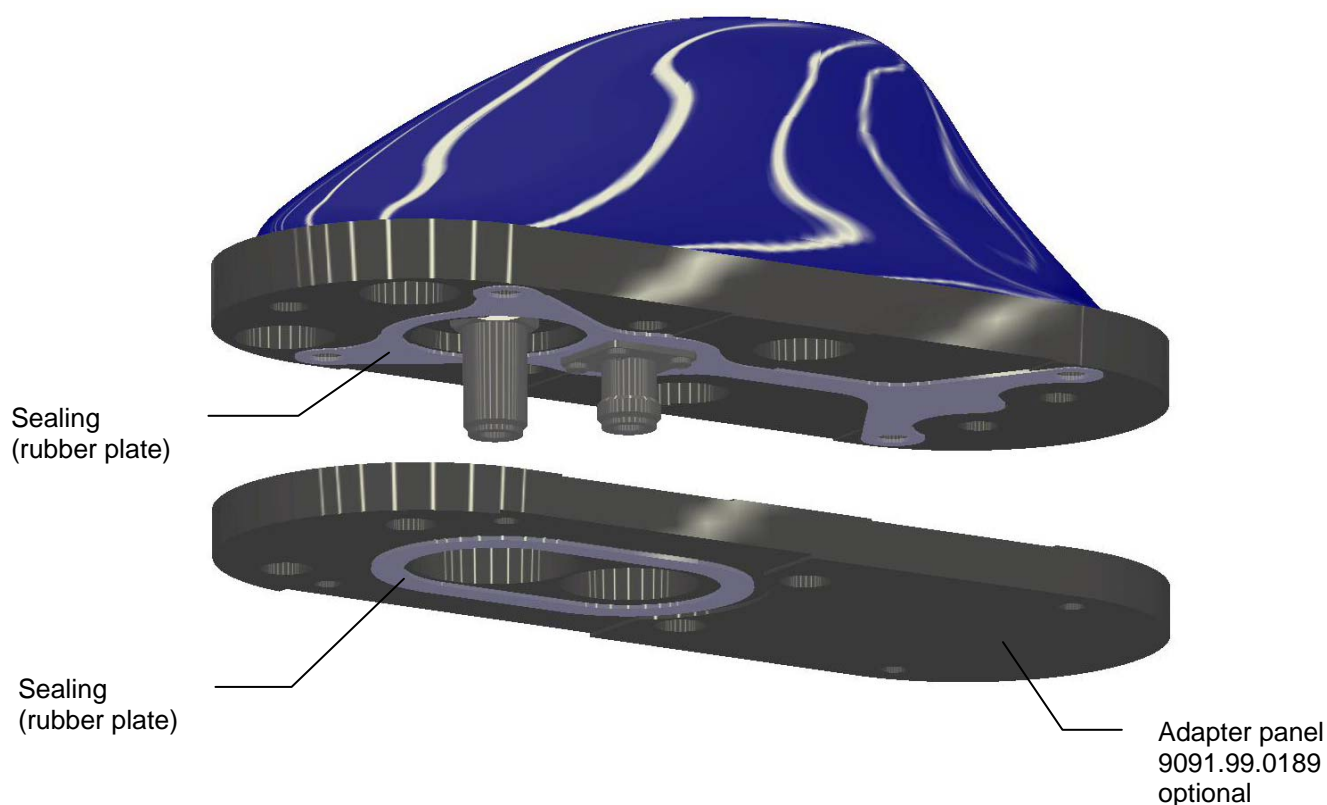

**HUBER+SUHNER group is certified according to ISO 9001 and ISO 14001.**

**WAIVER!**

While the information contained has been carefully compiled to the best of our present knowledge, it is not intended as representation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.



**HUBER+SUHNER**  
HUBER+SUHNER AG  
Mobile Communications + Electronics Sector  
Communication Equipment Components  
CH-9100 Herisau, Switzerland  
Tel.: +41 (0)71 353 41 11  
Fax: +41 (0)71 353 47 51  
[www.hubersuhner.com](http://www.hubersuhner.com)

Document no.: 01.02.0959  
Issue no.: 13  
Supersedes: 10.2004

***Uncontrolled Copy***

Issued/Checked/Released: 4159/4772/10.2004  
Last amended: 4159